



SERVING STATIONS

CUSTOM HOT FOOD TABLE OPEN BASE ELECTRIC MODELS 31000

Open shelving base hot food table with 16 gauge stainless top, and integral backsplash with 45° return. Individually and thermostatically controlled electrically heated food wells with 8" plate shelf. 6" high adjustable and movable legs.

SHORT FORM SPEC: Randell 31000 series electrically heated hot food table, top is one-piece 16 gauge stainless steel with raiser perimeter die-stamped 12" x 20" top openings and integral 6.75" coved backsplash with 45° return at top. Individual thermostatically controlled 1100 watt sealed food wells with drains. 8" deep stainless steel plate shelf houses controls, on/off indicator light and is removable for access to controls and heating elements. Unit is fully pre-wired to junction box for single-point field connection. Unit to be shipped standard on adjustable legs mounted to full length leg rails. cUL, UL, NSF.

AVAILABLE MODELS:

31330
31348
31360
31372
31386

STANDARD FEATURES:

- Available under one piece top with other modular equipment up to 16' in length
- 6" high legs—adjustable and movable
- Thermostatic controls for precise food temperatures
- Available for 120, 208, or 240 volt operation. Single or 3 phase as noted.
- Drains and manifold available as option (recommended)

UNIT TOP: Top to be one piece of die formed 16 gauge stainless steel with 2 5/8" nosing. Backsplash to be coved cornered, with 45° return at top and overall height of 6 3/4". Ends at top fitted with recessed heavy duty steel bars for field bolting units together, producing a hairline seam. Top stamped with individual 12" x 20" die formed raised perimeter openings. Unit top fitted with compliment of 12" x 12" x 6 1/2" deep food wells. Unit with 8" deep, removable 18 gauge stainless steel plate shelf.

FOOD WELLS: 12" x 20" x 6 1/2" deep electrically heated, sealed food wells, individually and thermostatically controlled.

CONTROLS: Unit comes standard with 1100 watt elements each independently controlled thermostatic controls. Controls and elements mounted on front of 8" deep removable stainless steel plate shelf designed to allow easy access to elements, controls and elements pans. Connections to heating elements are located outside of heated zone to avoid wiring deterioration. Individual food wells wired to common junction box(es).

UNIT BASE: Body ends to be die-formed stainless steel, finished and polished on the inside with corrosion resistant exterior. Insulated nosing and insulated back wall provided. Bottom shelf to be 22 gauge stainless steel with integrally welded channel bracing, and 8" coved cornered turn up at rear. Legs to be 6" high stainless steel with adjustable bullet foot. Legs mounted to full length channel frame assembly which is integrally welded to bottom of body assembly. Legs can be moved left to right to avoid floor obstacles during installation.



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



31348 shown with optional finished end and cutting board

OPTIONS/ACCESSORIES:

Dimensional Modification (L, H, D)
Backsplash Removed, Modified
Stainless Riser/Divider, End Splash
14 Gauge Top
Drains Manifolded to Common
Gate Valve
Individual Drains with Ball Valves
Extended Drain Handle(s)
Cutting Board
Marine Edge Top
500W (Low-Wattage) Elements
Manual Fill Faucet
Auto Water Fill
Adapter Plate(s)
Breath-Guard
Overshelfing
Additional Shelves
Sliding Doors
Hinged Door(s)
Drawers
Cord & Plug
3-Phase Power
Stainless Steel End(s), Back Panel
Laminated End(s), Back Panel, Doors
Curb Mount
Channel Base
Casters (Requires Cord/Plug Option)


ADDITIONAL RESOURCES:

[Request A Quote](#)

[Sales Tools](#)


[Find A Rep](#)

[KCL AutoCAD/Revit](#)

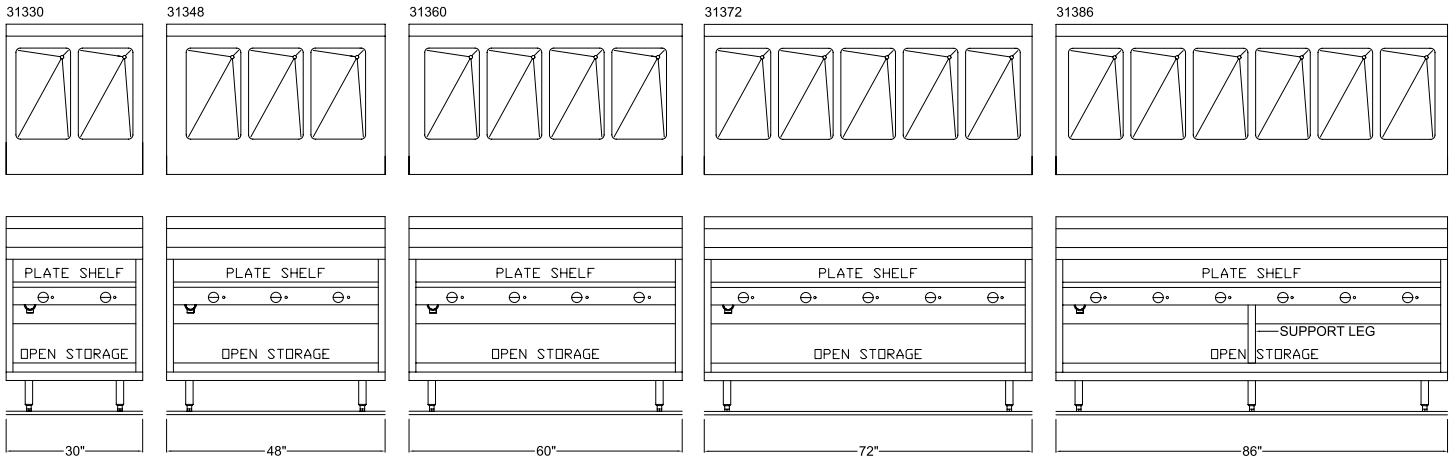

Model	Length	Depth	Work Height	Overall Height	No. of wells	No. of Elements	120V (500W)		120V		208V		240V		Ship Wt.
							KW	Amps	KW	Amps	KW	Amps	KW	Amps	
31330	30"	34"	36"	42.75"	2	2	1	8.3	2.2	18.4	2.2	10.6	2.2	9.2	224
31348	48"	34"	36"	42.75"	3	3	1.5	12.5	3.3	27.5	3.3	15.9	3.3	13.8	303
31360	60"	34"	36"	42.75"	4	4	2	16.7	4.4	36.8	4.4	21.2	4.4	18.4	383
31372	72"	34"	36"	42.75"	5	5	2.5	21.0	5.5	-	5.5	27.4	5.5	23	440
31386	86"	34"	36"	42.75"	6	6	3	25	6.6	-	6.6	31.7	6.6	27.5	497

DIMENSIONAL DETAIL:

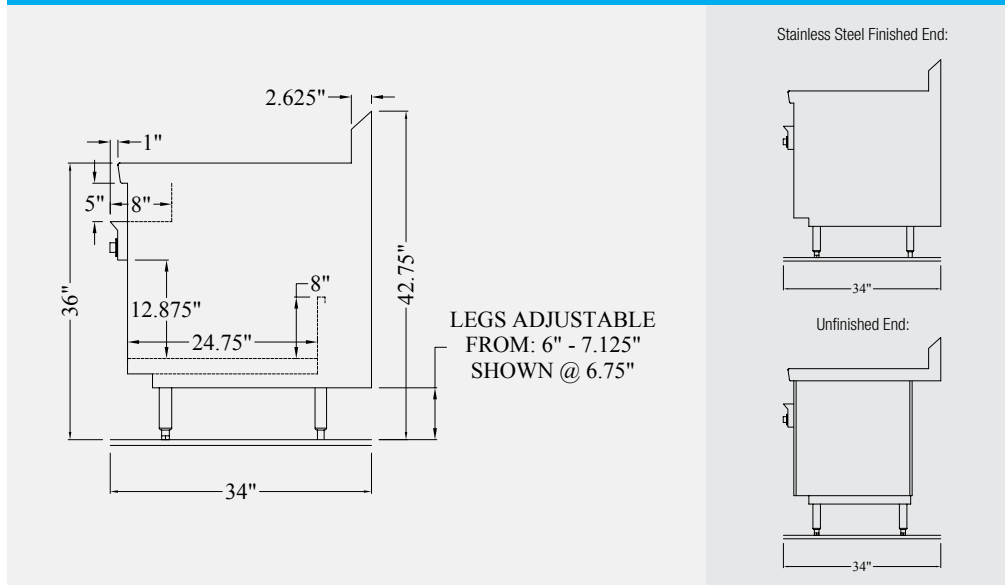

OPTIONAL ADAPTER PLATES:

