



SERVING STATIONS

DROP-IN WATERLESS HOT WELL MODELS EHI

Electric operated, stainless steel drop-in hot food well unit w/ individual die-stamped 12" x 20" top openings, individual thermostatically controlled sealed food wells. Controls mounted on separate pre-wired s/s control panel. Unit is totally pre-wired to junction box for single-point field connection.

SHORT FORM SPEC: Drop-in waterless hot food well unit with individual die-stamped 12" x 20" top openings, electrically heated sealed food wells with or without drain(s). Separate pre-wired s/s control panel houses individual thermostatic controls. Unit is totally pre-wired to junction box for single-point field connection. UL Listed, NSF.

AVAILABLE MODELS:

Note: xxx represents voltage; 120, 208, 240

EHI-1-xxx
EHI-2-xxx
EHI-3-xxx
EHI-4-xxx
EHI-5-xxx
EHI-6-xxx
EHI-2N-xxx
EHI-3N-xxx

STANDARD FEATURES:

- Individual thermostatic controls for precise food temperatures
- Die stamped, raised sanitary rim pan openings in stainless steel top
- Available for 120V, 208V, or 240 volt operation
- Available with or without drains

UNIT TOP: Top to be one piece 18 gauge stainless steel. Top openings to be die-stamped with raised perimeter rims.

FOOD WELLS: Units fitted with compliment of 12" x 20" x 6 1/2" deep, electrically heated, sealed food wells, and are individually and thermostatically controlled. Unit prewired to controls, mounted on separate stainless steel panel. Note: If optional drains & manifold are ordered, common gate is provided installed.

UNIT BODY: Fully insulated exterior body of corrosion resistant steel.

CONTROLS: Thermostatic controls (prewired to junction box) mounted on separate stainless steel panel for field installation in counter front. Each control has a lighted on/off power indicator. Connections to heating elements to be located outside of heated zone to avoid wiring deterioration.

Certifications:  

PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



EHI-4 Shown

OPTIONS/ACCESSORIES:

Adaptor Bars
Extended Thermostatic Lead
Drains with Manifold to
Common Valve (for wet use
and/or to aid in cleaning)

ADDITIONAL RESOURCES:

[Request A Quote](#)


[Sales Tools](#)

[Find A Rep](#)


[KCL AutoCAD/Revit](#)

Serving Stations
SP SHT2503 RevB

12/25

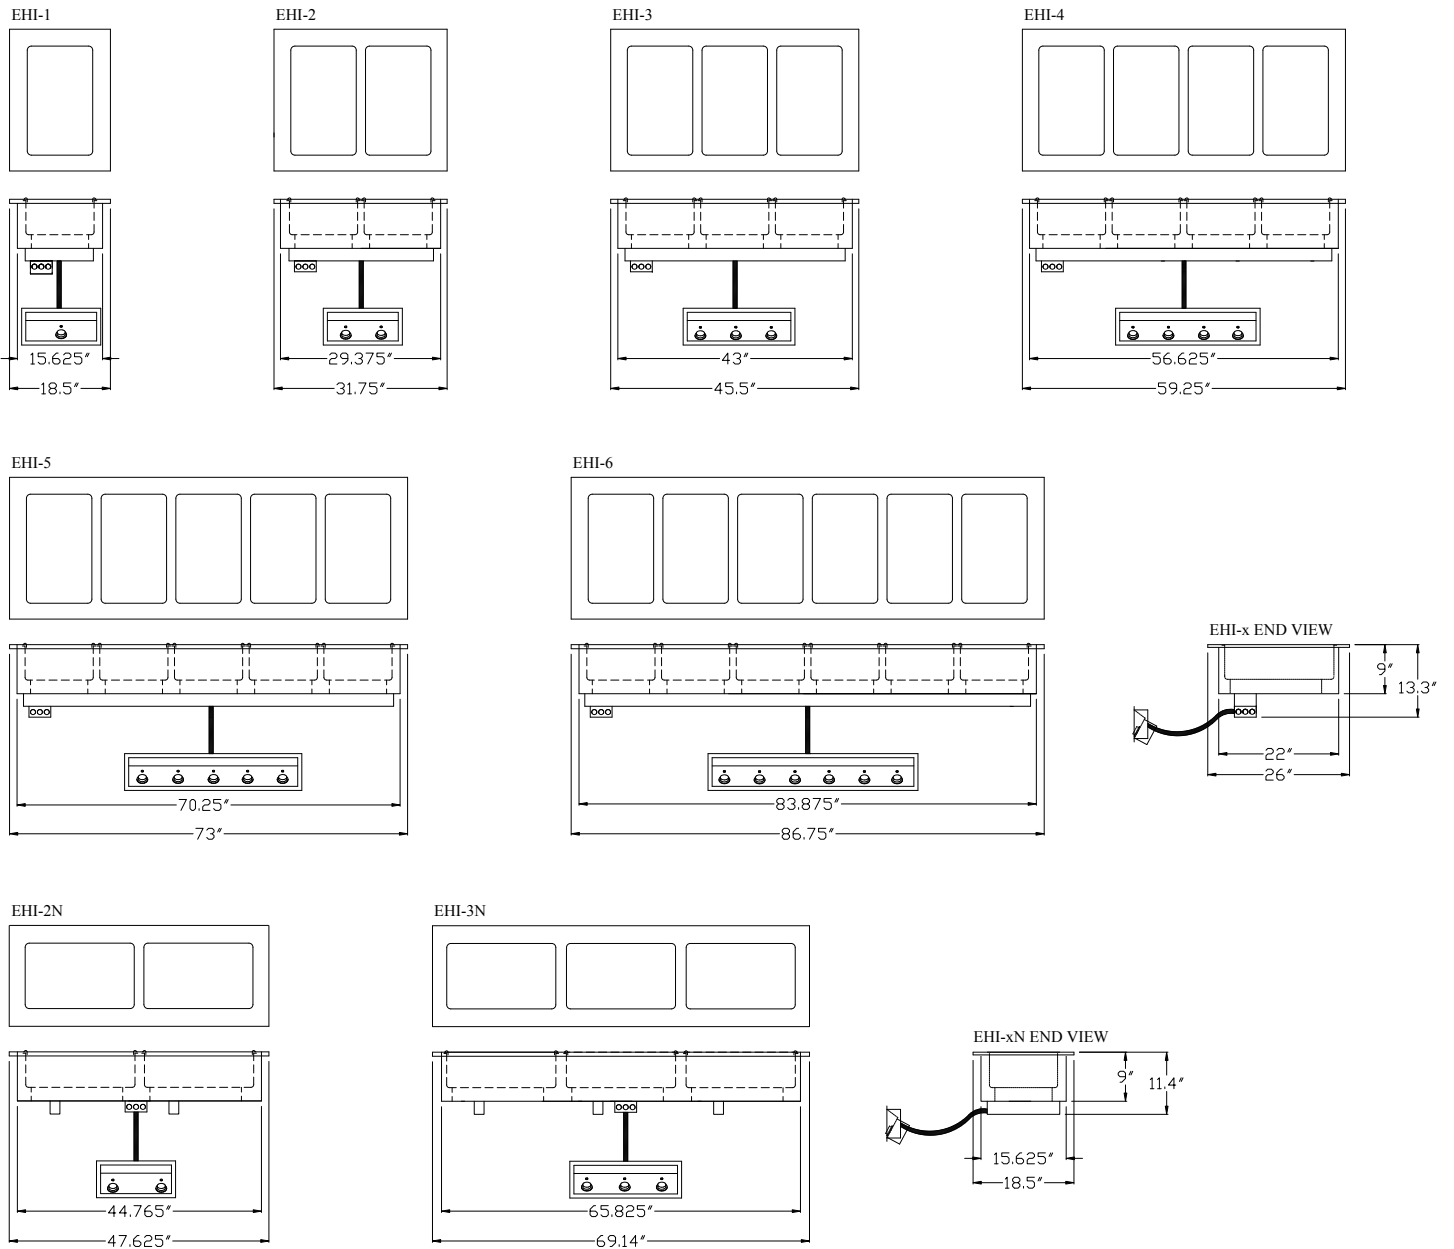

DRAIN VALVE LOCATION (DRAINS OPTIONAL)

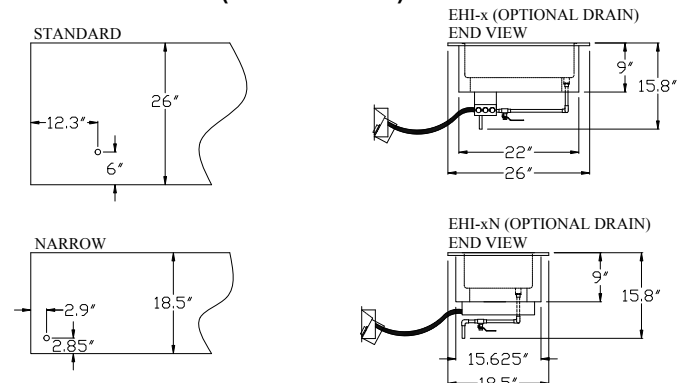

MODELS*	L	D	PAN CAPACITY 12" X 20"	UNIT CUTOUT SIZE	CONTROL PANEL CUTOUT SIZE	AMPS 120V / 500W	AMPS 208V / 500W	AMPS 240V / 666W	SHIP WT.
EHI-1-xxx	18.5"	26"	1	16.125" x 22.5"	14.25" x 5.75" x 6"	4.2	2.4	2.8	60
EHI-2-xxx	31.75"	26"	2	29.875" x 22.5"	14.25" x 5.75" x 6"	8.33	4.81	5.55	100
EHI-3-xxx	45.5"	26"	3	43.5" x 22.5"	20" x 5.75" x 6"	12.5	7.21	8.33	140
EHI-4-xxx	59.25"	26"	4	57.125" x 22.5"	26" x 5.75" x 6"	16.67	9.62	11.1	180
EHI-5-xxx	73"	26"	5	70.75" x 22.5"	32" x 5.75" x 6"	20.83	12.02	13.88	220
EHI-6-xxx	86.75"	26"	6	84.375" x 22.5"	38" x 5.75" x 6"	25	14.42	16.65	260
EHI-2N-xxx	47.6"	18.5"	2	45.264" x 16.125"	14.25" x 5.75" x 6"	8.33	4.81	5.55	100
EHI-3N-xxx	69.2"	18.5"	3	66.327" x 16.125"	20" x 5.75" x 6"	12.5	7.21	8.33	140

Power supply requires hard wiring to "J" box. *Note: xxx represents voltage; 120, 208, 240