



SERVING STATIONS

SERVING LINE UTILITY CORNER TRANSITION UNITS

MODELS RAN COR

Stainless steel utility corner transition units. 16 gauge stainless steel top with locking device designed to work with all other serving line equipment. Stainless steel body with interchangeable panels, is provided with 4 swivel casters (2 locking).

SHORT FORM SPEC: Stainless steel utility corner transition unit. 16 gauge stainless steel top with locking devices positioned to mate up to adjacent mobile serving units. Stainless steel body with interchangeable panels, is provided with 4 swivel casters (2 locking).

AVAILABLE MODELS:

RAN COR45
RAN COROPEN45
RAN COR90
RAN COR90M
RAN COROPEN90M

STANDARD FEATURES:


- All stainless steel top
- Swivel casters - (2) locking
- Concealed locking mechanism with easy to use spring activated catch
- Stainless steel body with interchangeable panels

CABINET CONSTRUCTION: Body frame to be all welded construction of steel with exposed corners to be 1 1/2" stainless steel. All corners welded and polished. Body end panels to be either stainless steel or plastic laminate with galvanized steel backing (specify laminate color). Body ends and panels to be removable to allow the changing of colors. Unit to be equipped with 4 swivel casters, (2) locking.

TOP CONSTRUCTION: Top to be one piece of die-formed 16 gauge stainless steel with 1 1/2", 90° nosing on all sides. Top provided with locking devices positioned to mate up to adjacent mobile serving units.

Certifications:

PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



OPTIONS/ACCESSORIES:

Overshelves
Trayslides
Corian top
Laminate panels
Powder-coated panels
Kick plate(s)
14 gauge top
Graphics
Breath Guards
Elementary School Height

ADDITIONAL RESOURCES:

[Request A Quote](#)


[Sales Tools](#)

[Find A Rep](#)

[KCL AutoCAD/Revit](#)

Serving Stations
SP SHT2403 RevB

07/25

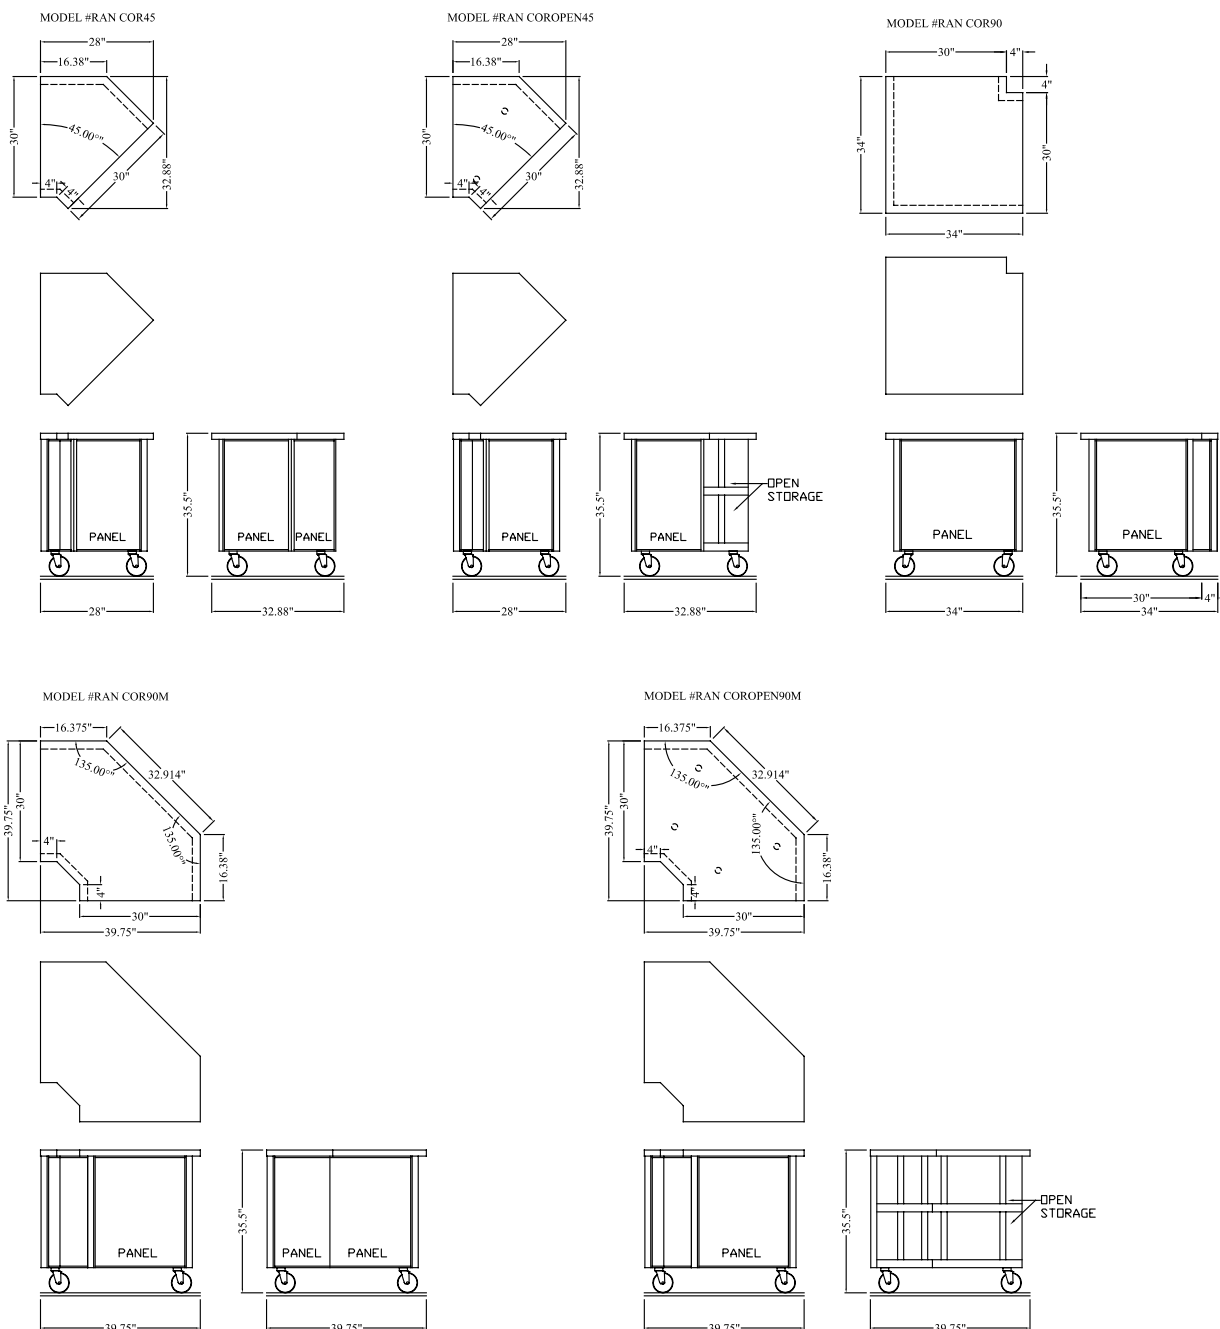

MODELS	L	D	H	Transition Angle	Base Style (Storage)	Ship Wt.
RAN COR45	28"	32.88"	35.5"	45°	Enclosed	100
RAN COROPEN45	28"	32.88"	35.5"	45°	Open	110
RAN COR90	34"	34"	35.5"	90°	Enclosed	130
RAN COR90M	39.75"	39.75"	35.5"	90°	Enclosed	140
RAN COROPEN90M	39.75"	39.75"	35.5"	90°	Open	150